

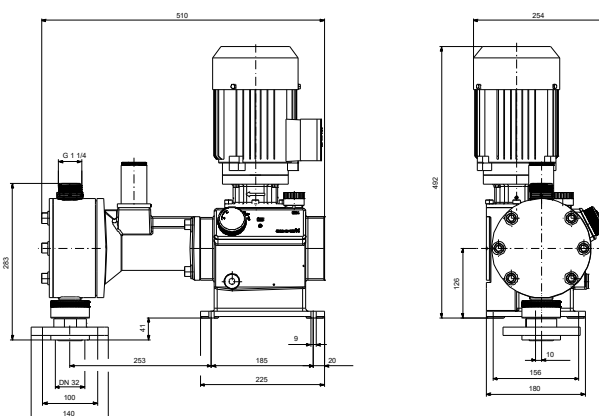
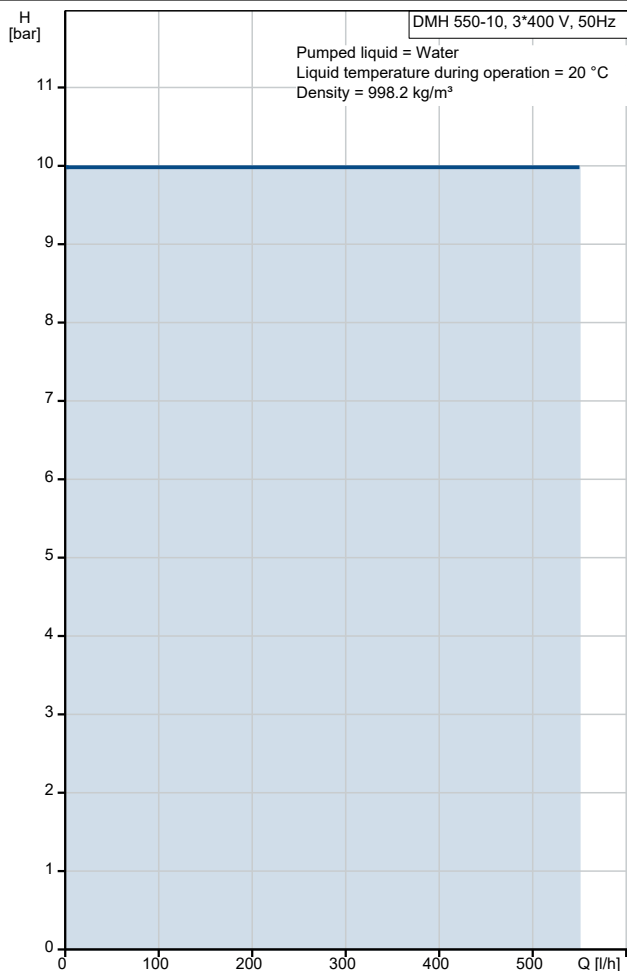


Description	Value
General information:	
Product name:	DMH 550-10 B-PVC/N/C-X-E7U3B8XEMAG
Product No:	99587834
EAN number:	5713831499527
Price:	
Technical:	
Nominal flow rate at 50 Hz:	550 l/h
Number of dosing heads:	1
Approvals:	CE,EAC,CNROHSEX
Non return valve type, inlet pump 1:	Ball valve, enlarged
Non return valve type, outlet pump 1:	Standard
Max viscosity:	5 mPas
Materials:	
Pump housing:	Aluminium
Dosing head, pump 1:	Plastic
Dosing head, pump 1:	PVC
Valve ball:	Ceramic
Valve ball:	Al ₂ O ₃
Valve seat:	Composite
Valve seat:	PTFE
Valve gasket:	FKM
Valve gasket:	Rubber
Installation:	
Max operating pressure at 50 Hz:	10 bar
Maximum permissible inlet pressure:	0.8 bar
Type of inlet connection:	Cementing
Type of outlet connection:	Connection pack
Size of inlet connection:	40
Size of outlet connection:	19/27, 20/25
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	0 .. 40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Power input P1:	0.6 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 230/400 V
Enclosure class (IEC 34-5):	IP55
Cable included (Yes/No):	N
Power plug:	No plug
Controls:	
Type of connector:	No plug
Type of control variant:	Standard
Frequency converter:	Not prepared for VFD
Others:	
Net weight:	37 kg
Gross weight:	45.7 kg
Shipping volume:	0.995 m ³
Diaphragm Leakage Detection:	N

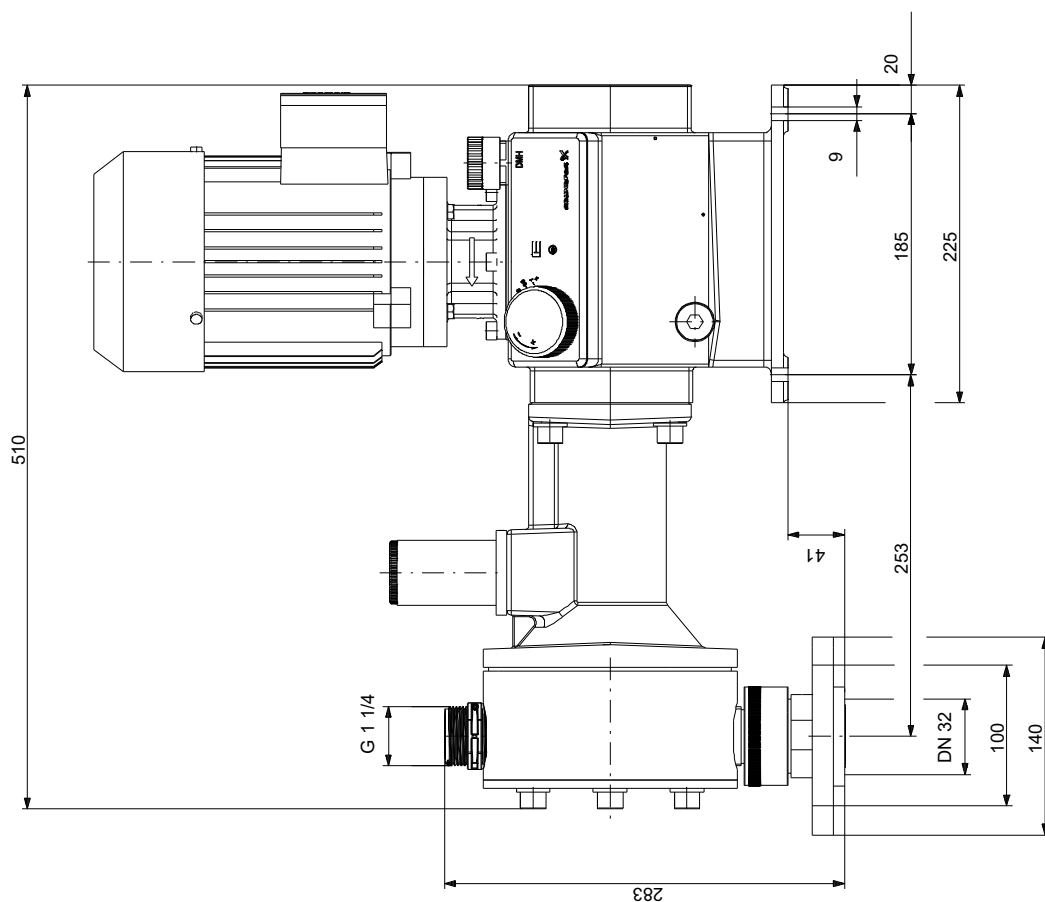

99587834 DMH 550-10 B-PVC/V/C-X-E7U3B8XEMAG 50 Hz

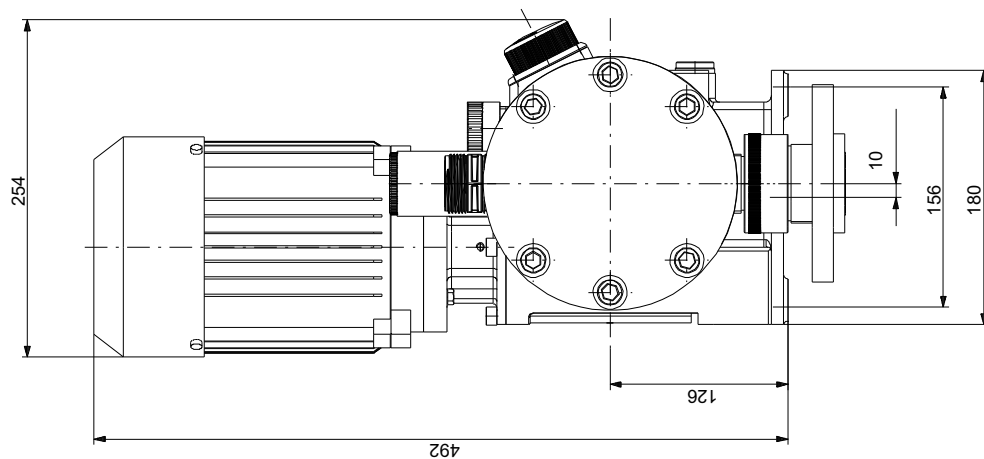

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.