

DIESEL IRON PUMP

-  Air Cooled Engine
-  IP 23 Protection
-  Diesel Engine
-  Noise Compliant

Feature:

- Cast-iron pump with a closed cast-iron impeller.
- Simple in structure,Reliable in performnce.
- Max.discharge head :65M. Capacity max 25m³/hr at 40M.
- Minimal vibration&smooth running.
- CE approved.



SPECIFICATION


| DIESEL IRON PUMP | | | |
|-------------------------|-------------|-------------|-------------|
| Model | LDTP40C | LDTP50DC | LDTP80C |
| Inlet(inch) | 1.5 | 2 | 3 |
| Outlet(inch) | 1.5 | 2 | 3 |
| Max.capacity(m³/hr) | 19 | 30 | 50 |
| Max.discharge head(m) | 55 | 65 | 65 |
| Self-priming time(S/4m) | 8 | 8 | 8 |
| Max.suction head(m) | 296 | 406 | 406 |
| Engine model | LA178 | LA186 | LA186 |
| Fuel tank capacity (L) | 3.5 | 5.5 | 5.5 |
| Dimension (LxWxH)(mm) | 465x440x540 | 545x475x605 | 545x475x605 |
| Net weight(recoil) (kg) | 55 | 64 | 72.5 |

DIESEL HIGH PRESSURE PUMP

-  Air Cooled Engine
-  IP 23 Protection
-  Diesel Engine
-  Noise Compliant

Feature:

- Thickening high quality aluminum alloy pump housing.
- Enclosed Impeller structure with high discharge head, large flow , max. lift 75M.
- Aluminum three-outlet with multi option, light portable.
- Widely use: high pressure water conveyance, fire fighting.
- Long distance water conveyance, hilly irrigation etc.

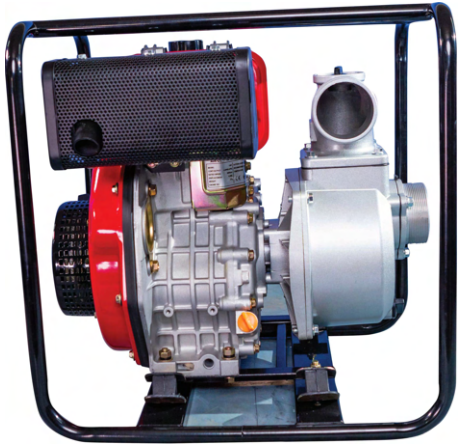

SPECIFICATION

| DIESEL HIGH PRESSURE PUMP | | | | | |
|---------------------------|----------------|----------------|----------------|----------------|-------------|
| Model | DHPP-GP40C | DHPP-GP40C-2 | DHPP-GP50C | DHPP-GP50C-2 | DHPP-GP80C |
| Inlet(inch) | 1.5 | 1.5 | 2 | 2 | 3 |
| Outlet(inch) | 1" *2, 1.5" *1 | 1" *2, 1.5" *1 | 2" *1, 1.5" *2 | 2" *1, 1.5" *2 | 3" *1 |
| Impeller No. | 1 | 2 | 1 | 2 | 1 |
| Max.capacity(m³/hr) | 17 | 15 | 20 | 20 | 40 |
| Max.discharge head(m) | 55 | 75 | 55 | 75 | 60 |
| Self-priming time(S/4m) | 30 | 30 | 30 | 30 | 30 |
| Max.suction head(m) | 8 | 8 | 8 | 8 | 8 |
| Engine model | GP178 | GP178 | GP178 | GP178 | GP186 |
| Fuel tank capacity (L) | 3.5 | 3.5 | 3.5 | 3.5 | 5.5 |
| Dimension (LxWxH)(mm) | 540x440x540 | 540x440x540 | 540x440x540 | 540x440x540 | 645x475x605 |
| Net weight(recoil) (kg) | 45 | 47 | 45 | 47 | 62 |