

# Product data sheet

Specifications



## Harmony, Socket, for RXM2/RXM4 relays, screw clamp terminals, mixed contact

RXZE2M114

### Main

Range of product	Harmony Electromechanical Relays Harmony Timer Relays
Product or component type	Socket
Contact terminal arrangement	Mixed
Product compatibility	Plug-in relay RXM with 2 C/O contact Plug-in relay RXM with 4 C/O contact
Shape of pin	Flat
Device short name	RXZ
Sale per indivisible quantity	10

### Complementary

[Ith] conventional free air thermal current	10 A
[Ue] rated operational voltage	< 250 V
Connections - terminals	Screw clamp terminals, 1 x 0.25...1 x 1 mm <sup>2</sup> (AWG 22...AWG 17) flexible with cable end Screw clamp terminals, 2 x 0.25...2 x 1 mm <sup>2</sup> (AWG 22...AWG 17) flexible with cable end Screw clamp terminals, 1 x 0.5...1 x 1.5 mm <sup>2</sup> (AWG 20...AWG 16) solid without cable end Screw clamp terminals, 2 x 0.5...2 x 1.5 mm <sup>2</sup> (AWG 20...AWG 16) solid without cable end
Tightening torque	< 1 N.m for M3 screw(s)
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
Marking	CE
Width	30 mm
Net weight	0.048 kg

### Environment

[Uimp] rated impulse withstand voltage	4 kV
Overvoltage category	III
Pollution degree	3
Standards	IEC 61984
Product certifications	UL CSA Lloyd's

Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...55 °C
IP degree of protection	IP20 conforming to EN/IEC 60529
Dielectric strength	2500 V

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	52.0 g
Package 1 Height	3.896 cm
Package 1 width	3.005 cm
Package 1 Length	8.218 cm
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Weight	0.621 kg
Package 2 Height	7.4 cm
Package 2 width	8.8 cm
Package 2 Length	15.0 cm
Unit Type of Package 3	S03
Number of Units in Package 3	200
Package 3 Weight	11.851 kg
Package 3 Height	30.0 cm
Package 3 width	30.0 cm
Package 3 Length	40.0 cm


## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

## Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

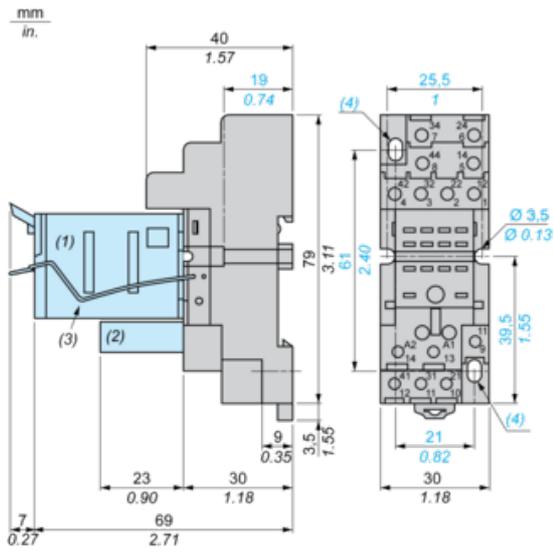

- (1) Relays
- (2) Protection module
- (3) Maintaining clamp
- (4) 2 elongated holes  $\varnothing$  3.5 mm x 6.5 mm /  $\varnothing$  0.13 in. x 0.25 in.

## Wiring Diagram

---

