


Product data sheet

Specifications

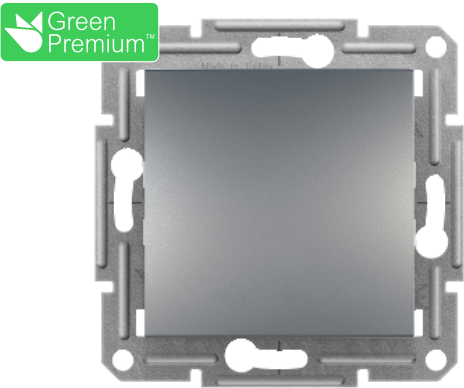

Asfora - 1pole 2way switch, screwless terminals, wo frame, steel

EPH0400162

Main

Range	Asfora
Product or component type	Switch
Device presentation	Mechanism with fixing frame
Load type	Load for energy saving lamps with ballast: 100 W
Colour tint	Steel
Type of packing	Flow-pack

Complementary

Device mounting	Flush
Switch function	1-pole 2-way
Number of rocker	1.0
Power range	2300 W
Rated current	10 AX at 250 V AC
Connections - terminals	Screwless terminals
Number of cables	2 cable(s) 2.5 mm²
Cable stiffness	Flexible Rigid Solid stranded
Wire stripping length	13.0 mm
Material	ABS (acrylonitrile butadiene-styrene)
Surface finish	Painted
Conductor material	Copper
Fixing mode	Screws or claws51...70 mm
Height	71 mm
Width	71 mm
Depth	43.0 mm
Projecting depth	15 mm
Net weight	0.05975 kg

Environment

Standards	IEC 60669-1
Product certifications	TSE VDE NF
Quality labels	CE UKR
IP degree of protection	IP20
Ambient air temperature for operation	-5...40 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	61.0 g
Package 1 Height	4 cm
Package 1 width	7 cm
Package 1 Length	7 cm
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Weight	687.0 g
Package 2 Height	9.5 cm
Package 2 width	18.5 cm
Package 2 Length	27.5 cm
Unit Type of Package 3	S04
Number of Units in Package 3	120
Package 3 Weight	8.863 kg
Package 3 Height	30 cm
Package 3 width	40 cm
Package 3 Length	60 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins